


optix170™



LED LIGHTING SYSTEM



UL
 E345255

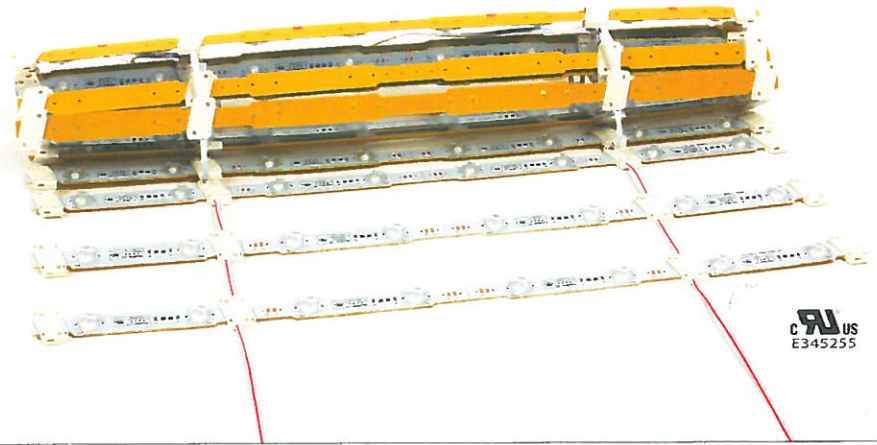

LightBoard Technologies is now offering the optix170™ from FourStar LED for back-lighting applications. These powerful and cost effective lights are lightweight, easy to install, and perfect for backlighting lower profile light boxes. They offer customization to achieve optimal performance for unique configurations.

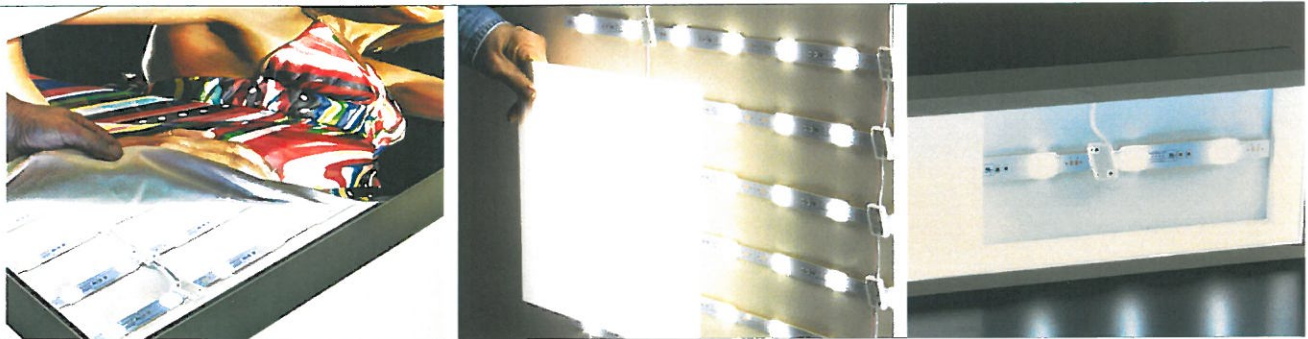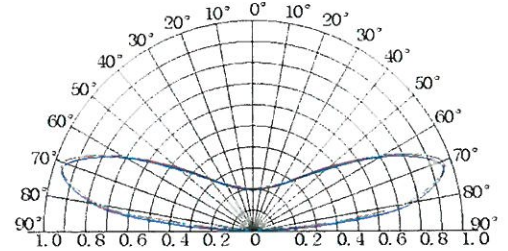

Notes:

- The optix170™ lighting system is a UL Recognized Component when connected to a class 2 power supply.
- Standard spacing between strips is 3" and can effectively illuminate light boxes as thin as 2" deep.

Specs	Optix170	Optix170M
Overall Length	23.625"	23.625"
Width	.8125"	.8125"
Circuit Length	6"	6"
Voltage	24V DC	24V DC
LED Angle	170°	170°
LED Quantity	8/Strip	8/Strip
Power Supply	Class 2	Class 2
Brightness	360 Lumens	360 Lumens
Color Temp (K)	6500° - 8000°	6500° - 8000°
Estimated Lifetime	50,000 Hrs	50,000 Hrs
Power Consumption	4.5W/Strip	4.5W/Strip
Rating	IP33 (Dry)	IP65 (Dry, Damp)
PCB	Fiber	Aluminum
Warranty	2 Year Limited	2 Year Limited